




CATALOGUE PAGES



ISOS 2A & 3A

TWO AND THREE ARTICULATIONS ISOS LAMP

IS 2A 11 and IS 3A 11

The ISOS 2A and 3A lamps are equipped with 11 W fluorescent bulbs. Functional and efficient, they are made for today's workstations with display screens equipment and above all for call centres.

Easy to be adapted to toolbars and screens with third level bars. The arm with double or triple articulation allows an orientation in any direction (amplitude 65 cm for the 2A and 90 cm for the 3A). Made in steel, brass and ABS. 2.00 m electrical wire length. Ballast on integrated plug, classified EEI : B2. Assembling double isolation. Complies with European standards CE, NF EN 60598.1 and 60598.2.4. National mark of conformity NF

Anti glare diffuser with dimmer in option Ref. SCG
(See ISOS lamp page 83).

For more information on this product download the technical sheet on www.manade.com




References for 2A

- ISOS 2A with clamp : **IS 2A 11 P**
- ISOS 2A with base : **IS 2A 11 S**
- ISOS 2A with standard spigot : **IS 2A 11 A**
- ISOS 2A with special spigot : **IS 2A 11 AS**
- ISOS 2A with Surf adaptor : **IS 2A 11 SURF**
- ISOS 2A with adaptor for table top : **IS 2A 11 OBTU**

References for 3A

- ISOS 3A with clamp : **IS 3A 11 P**
- ISOS 3A with base : **IS 3A 11 S**
- ISOS 3A with standard spigot : **IS 3A 11 A**
- ISOS 3A with special spigot : **IS 3A 11 AS**
- ISOS 3A with Surf adaptor : **IS 3A 11 SURF**
- ISOS 3A with adaptor for table top : **IS 3A 11 OBTU**

-  01 White
-  24 Black
-  27 Anthracite Grey
-  29 Silver

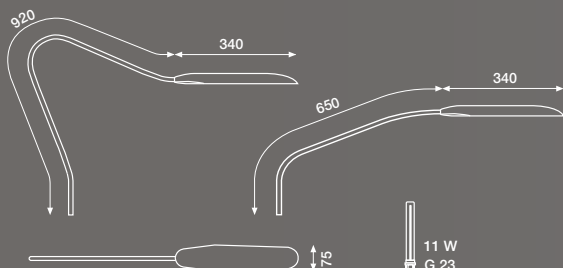

Gémini 2A & 3A

TWO AND THREE ARTICULATIONS GEMINI LAMP – GE 2A 2x9 and IS 3A 2x9

The GEMINI 2A and 3A lamps are equipped with 2 x 9 W fluorescent bulbs. Functional and efficient, they are made for today's workstations with display screens equipment and above all for call centres.

Easy to be adapted to tool bars and screens with third level bars.

The arm with double or triple articulation allows an orientation in any direction (amplitude 65 cm. for the 2A and 90 cm. for the 3A). Made in steel, brass and ABS. 2.00 m electrical wire length. Ballast on integrated plug, classified EEL : B2 Assembling double isolation. Complies with European standards CE, NF EN 60598.1 and 60598.2.4. National mark of conformity NF.

Asymmetric anti glare diffuser in option Ref. GEG (see GEMINI lamp page 85).

For more information on this product download the technical sheet on www.manade.com



References GEMINI 2A

- GEMINI 2A with clamp : **GE 2A 2x9 P**
- GEMINI 2A with base : **GE 2A 2x9 S**
- GEMINI 2A with standard spigot : **GE 2A 2x9 A**
- GEMINI 2A with special spigot : **GE 2A 2x9 AS**
- GEMINI 2A with Surf adaptor : **GE 2A 2x9 SURF**
- GEMINI 2A with adaptor for table top : **GE 2A 2x9 OBTU**

References for 3A

- GEMINI 3A with clamp : **GE 3A 2x9 P**
- GEMINI 3A with base : **GE 3A 2x9 S**
- GEMINI 3A with standard spigot : **GE 3A 2x9 A**
- GEMINI 3A with special spigot : **GE 3A 2x9 AS**
- GEMINI 3A with Surf adaptor : **GE 3A 2x9 SURF**
- GEMINI 3A with adaptor for table top : **GE 3A 2x9 OBTU**



Fixtures for ISOS 2A, 3A and GEMINI 2A, 3A lamp

Flat Steel base (weight 2.6 Kg)
Zamak clamp (opening 80 mm – depth 60 mm)
Special spigots are available to adapt the lamp to different office furniture systems and onto SURF or DUALIS toolbars and wall and screens bars.

